

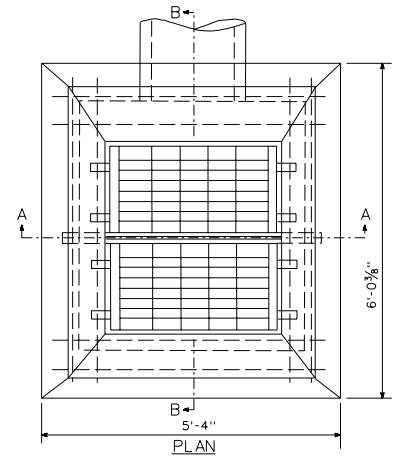




**NOTES**  
 FOR DETAILS OF STEEL FRAME & GRATE SEE STANDARD SHEET NO. 507-K  
 TWO FRAMES & GRATES REQUIRED FOR EACH CATCH BASIN.  
 WALLS OF ALL CATCH BASINS OVER 10 FT. DEEP TO BE INCREASED TO 12" THICKNESS, INSIDE DIMENSIONS TO REMAIN THE SAME.  
 ALL STEEL, EXCEPT REINFORCING BARS, SHALL BE GALVANIZED IN ACCORDANCE WITH M.06.03.  
 ALL BARS SHALL HAVE 2" COVER.

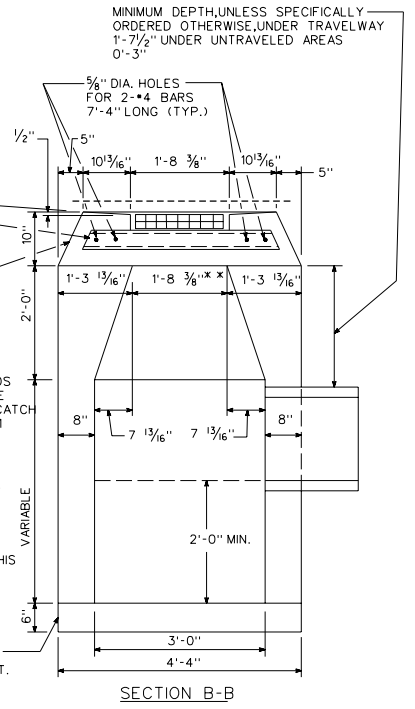

NORMAL FINISHED GRADING, GRADING TO BE VARIED ADJACENT TO CATCH BASIN AS DIRECTED  
 CLASS "A" CONCRETE POURED IN PLACE OR PRECAST CONCRETE UNIT.

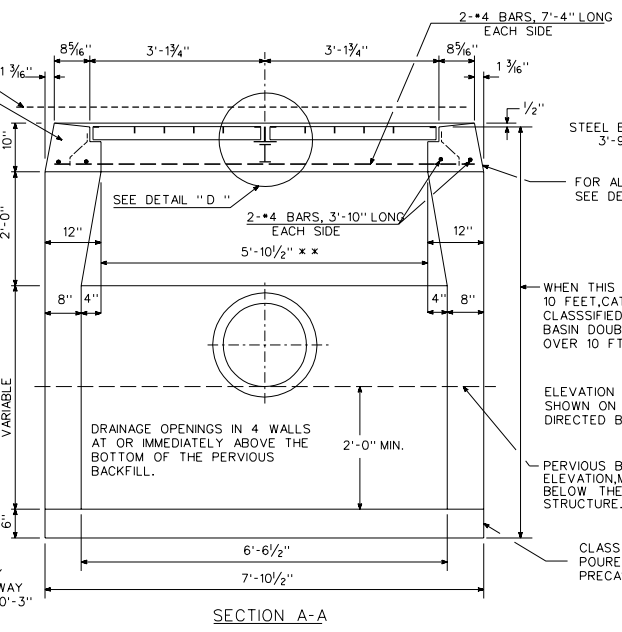


TYPE "C-L" CATCH BASIN DOUBLE GRATE - TYPE II

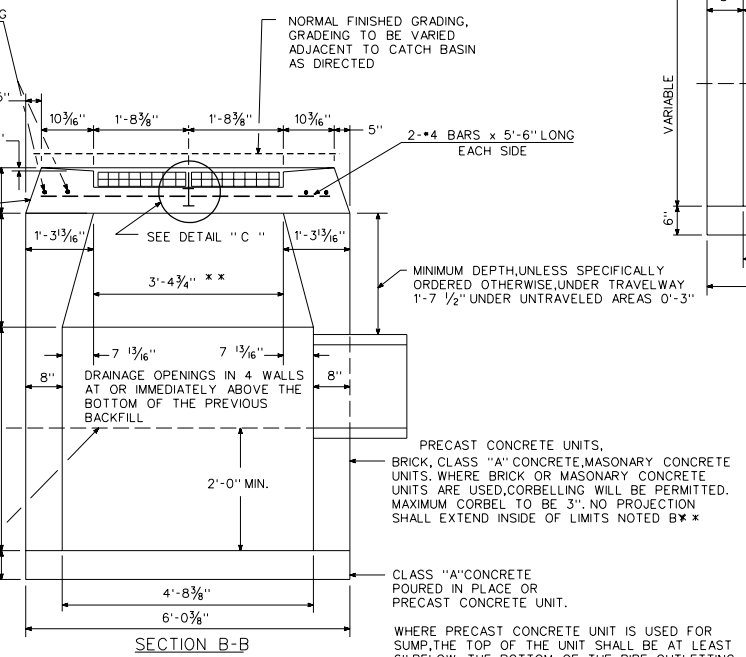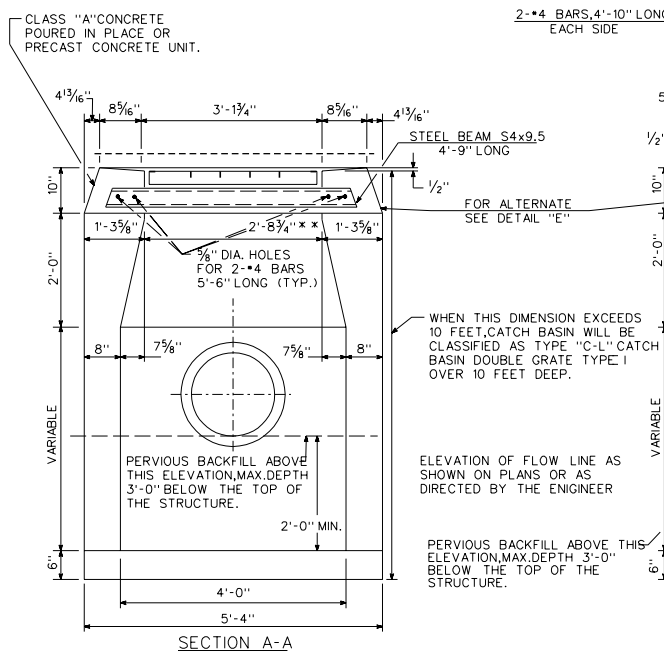

TYPE "C-L" CATCH BASIN DOUBLE GRATE - TYPE I AND II

TYPE "C-L" CATCH BASIN DOUBLE GRATE - TYPE I

MANUAL REVISIONS TO THIS DOCUMENT ARE PROHIBITED. ALL REVISIONS MUST BE PERFORMED ON:  
 Cadd File: QSA21200,2001507E.DGN



J. BARRY  
 GLENN L. ARZT  
 TOM MCMAHON  
 JOHN JENSEN  
 D.L. COFFEY  
 APRIL 75  
 1 FEB. 89  
 9 FEB. 89  
 JULY 89  
 JULY 90  
 12/3/90